


Figure 5-9

SIP establishment of a two-party call

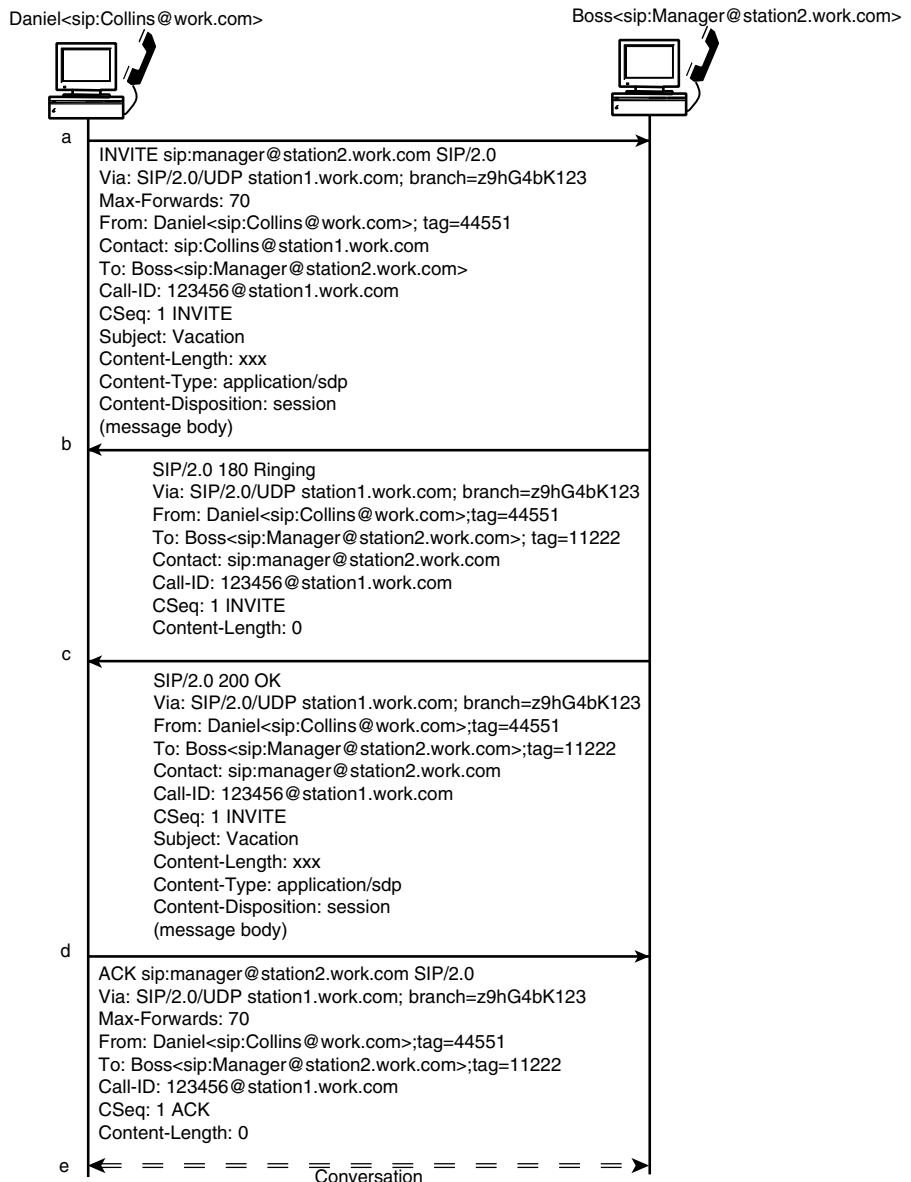

header field has the same value as the Request-URI, because we are not traversing any proxies. (As described later in this chapter, the Request-URI can be changed when a message passes through a proxy.)

The From: header field indicates that the call is from collins@work.com. As can be seen from Figure 5-9, SIP enables a display name to be used with